

Utility Patent Application Transmittal

(Only for new nonprovisional applications under 37 CFR § 1.53(b))

Attorney Docket Number	7024-415
First Inventor or Application Identifier	ADAMCHUK, Viacheslav I.
Title	SYSTEM AND METHOD FOR AUTOMATED MEASUREMENT OF SOIL pH
Express Mail Label Number	EL111279969US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

Address To: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ *Fee Transmittal Form (e.g., PTO/SB/17)

Specification

[Total Pages **16**]

(preferred arrangement set forth below)

- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Investigation
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets **6**]

4. Oath or Declaration

[Total Pages **2**]

- a. ☒ Newly executed (original or copy) (unsigned)
- b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

Note for items 1 & 13: In order to be entitled to pay Small Entity fees, a small entity statement is required (37 C.F.R. § 1.27), except if one filed in a prior application is relied upon (37 C.F.R. § 1.28).

5. ☐ Microfiche Computer Program (Appendix)6. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney (when there is an assignee)9. ☐ English Translation Document (if applicable)10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations11. ☐ Preliminary Amendment12. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)13. ☒ *Small Entity Statement(s) ☐ Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)15. ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:


☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner: _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label or ☒ Correspondence address below


Insert Customer No. or Attach bar code label here

Name	Woodard, Emhardt, Naughton, Moriarty and McNett					
Address	Bank One Center/Tower 111 Monument Circle, Suite 3700					
City	Indianapolis	State	IN	Zip Code	46204-5137	
Country	USA	Telephone	317-634-3456	Fax	317-637-7561	
Name (Print/Type)	Troy J. Cole			Registration No. (Attorney/Agent)	35,102	
Signature				Date	August 11, 1999	

Express Mail Label Number EL111279969US

Date of Deposit August 11, 1999

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR Section 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington DC 20231.


Signature of person mailing paper or fee

PTO
09/372151
Jc525 U.S. PTO
08/11/99

08/11/99

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) and 1.27(d)) - NONPROFIT ORGANIZATION**

I hereby declare that I am an official empowered to act on behalf of the nonprofit organization identified below:

NAME OF ORGANIZATION: Purdue Research Foundation
ADDRESS OF ORGANIZATION: Office of Technology Transfer
1021 Hovde Hall, 3rd Floor
West Lafayette, Indiana 47907-1021

TYPE OF ORGANIZATION:

- ☐ UNIVERSITY OR OTHER INSTITUTION OF HIGHER EDUCATION
☒ TAX EXEMPT UNDER INTERNAL REVENUE SERVICE CODE (26 USC 501(a) and 501(c)(3))
☐ NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA
NAME OF STATE: _____
CITATION OF STATUTE: _____
☐ WOULD QUALIFY AS TAX EXEMPT UNDER INTERNAL REVENUE SERVICE KAMERICA
☐ WOULD QUALIFY AS NONPROFIT SCIENTIFIC OR EDUCATIONAL UNDER STATUTE OF STATE OF THE UNITED STATES OF AMERICA IF LOCATED IN THE UNITED STATES OF AMERICA
NAME OF STATE: _____
CITATION OF STATUTE: _____

I hereby declare that the nonprofit organization identified above qualifies as a nonprofit organization as defined in 37 CFR 1.9(e) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code with regard to the invention entitled SYSTEM AND METHOD FOR AUTOMATED MEASUREMENT OF SOIL pH by inventors Viacheslav I. Adamchuk, Mark T. Morgan and Daniel R. Ess and described in _____

- ☒ The specification filed herewith.
☐ Application Serial No. _____, filed _____.
☐ Patent No. _____, issued _____.

I hereby declare that rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified invention. Further, no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights in the invention must file separate verified statements averring to their status as small entities. Each person, concern or organization having any right in the invention is listed below:

- ☒ no such person, concern, or organization exists.
☐ each such person, concern or organization is listed below.

FULL NAME: _____
ADDRESS: _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Bruce L. Pershing

TITLE IN ORGANIZATION

OF PERSON SIGNING:

ADDRESS OF PERSON SIGNING:

Secretary

Office of Technology Transfer

1021 Hovde Hall, 3rd Floor

West Lafayette, Indiana 47907-1021

Date

Bruce L. Pershing, Secretary

#57585

SYSTEM AND METHOD FOR AUTOMATED MEASUREMENT OF SOIL pH

CROSS REFERENCE TO RELATED APPLICATIONS

The present application claims benefit under Title 35, United States Code, Section 119(e) of U.S. Provisional Patent Application Serial No. 60/096,172, filed August 11, 1998.

TECHNICAL FIELD OF THE INVENTION

The present invention relates to detecting the acidity or alkalinity of soil. More particularly, it relates to methods and devices for automatically collecting data on the acidity or alkalinity of soil at a number of places in a field.

BACKGROUND OF THE INVENTION

Site-specific farming, or precision farming, is used today in order to improve crop yields, lower costs, and to protect the environment, by treating different parts of a given field according to their specific conditions, instead of treating the entire field according to the average conditions throughout. In this way, for example, lime can be applied only to areas of a field which have overly acidic soil, which reduces the costs of materials and labor, and avoids excessively alkaline soil from unnecessary liming.

Typically, data on soil properties, including pH, are gathered by collecting a number of soil samples and analyzing them in a laboratory. The standard laboratory pH test for a single soil sample requires mixing equal masses of de-ionized water and soil, stirring vigorously for five to ten seconds, letting the mixture stand for ten to thirty

minutes, and measuring the pH of the slurry using a calibrated pH meter. This process must be repeated for each sample. Furthermore, each sample must be individually packaged to keep it from being contaminated during transport from the field to the laboratory, and labeled or otherwise identified with the specific location from which it was collected.

Because of the difficulty and expense of collecting and analyzing samples in the field with laboratory analysis, the total number of samples that can feasibly be collected is limited. Consequently, the resolution of the data is limited, so that current methods generally produce values of soil properties for areas on the order of a hectare.

As will be appreciated by persons of ordinary skill in the art, soil pH may have significant variation within a field. Some fields have soil pH ranging from 5 to 8, with a coefficient of variation exceeding 10%. Combining soil samples over an area of 1ha leads to a loss of information about spatial variability, and doubts exist about the accuracy of interpolated maps from grid soil sample data. Therefore, persons of ordinary skill in the art will recognize that the variation in soil pH over the area of a single grid can greatly exceed the experimental error in measuring soil pH. The accuracy with which processes such as liming, which are indicated based at least in part on soil pH, can be prescribed is restricted primarily by sampling density. Consequently, crop productivity as a whole is restricted by sampling density. Thus, there is an ongoing need to develop systems and methods to decrease the cost of soil sampling and to improve the resolution of soil property maps. The present invention is directed toward meeting this need.

SUMMARY OF THE INVENTION

The present invention relates to a method and apparatus for automatically measuring soil pH in the field. An apparatus is disclosed, suitable for a standard tractor to tow, which will automatically measure soil pH at a relatively large number of places throughout a field. Also disclosed is an apparatus for automatically measuring the soil pH at a relatively large number of places throughout a field, including a device for simultaneously measuring the position of the apparatus, in order to automatically create a soil pH map.

In one form of the invention, an apparatus for automatically measuring the pH of soil at a relatively large number of places in the field is disclosed, comprising a chassis suitable for towing by a standard tractor; a plurality of wheels; a tank for holding water; a compressed air tank; at least one shank for exposing the soil at the desired sampling depth; at least one pH sensor, each including at least one probe; a probe assembly for each probe, including a sampling platform for collecting soil from pre-selected soil depths and bringing it into contact with the probe, an actuator for moving the sampling platform between an extended position in which a soil sample is collected and a retracted position in which the soil sample is in contact with the probe, and one or more nozzles connected by hoses to the tanks of water for cleaning the probe between measurements by directing water onto it; and an onboard computer for collecting and storing the data.

Another form of the invention includes an apparatus for automatically creating a map of the pH of soil in a field, comprising an apparatus for automatically measuring the pH of soil at a relatively large number of places in the field, and a sensor for continuously

detecting the position of the apparatus to allow each pH measurement to be automatically recorded in conjunction with the location of the soil which was measured.

Another form of the invention includes a method for measuring the pH of the soil at a relatively large number of places throughout a field, comprising: providing an apparatus for automatically measuring the pH of soil at a relatively large number of places in the field, including a chassis suitable for towing by a standard tractor, a plurality of wheels, a tank for holding water, a compressed air tank, at least one shank for exposing soil at the desired sampling depth, at least one pH sensor, each including a probe, a probe assembly for each probe including a shank for controlling the location of the probe assembly relative to the surface of the ground, a sampling platform for collecting soil from pre-selected soil depths and bringing it into contact with the probe, an actuator for moving the sampling platform between an extended position in which a soil sample is collected and a retracted position in which the soil sample is in contact with the probe, and one or more nozzles connected to a reservoir of water for cleaning the probe between measurements by directing water onto it, and an onboard computer for collecting and storing the data; selecting a depth at which soil pH measurements will be made; selecting a speed corresponding to the desired distance between locations for pH measurements; and towing the chassis through the field at the selected speed to collect data for a number of places throughout it.

Another form of the invention includes a method for creating a relatively high resolution pH map for a field, comprising: providing an apparatus for automatically creating a map of the pH of soil in a field; selecting a depth at which soil pH measurements will be made; selecting a speed corresponding to the desired distance

between locations for pH measurements; and towing the chassis through the field at the selected speed to collect data for a number of places throughout it.

One object of the present invention is to provide a unique apparatus for creating relatively high resolution pH maps. Other objects and advantages of the present invention will be apparent from the following description.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side elevational view of an apparatus for automatic measurement of soil pH according to the present invention.

FIG. 2 is a side elevational view of further details of the probe assembly shown in FIG. 1.

FIG. 3 is a side elevational view of the sampling platform shown in FIG. 1.

FIG. 4 is a schematic diagram of an apparatus for automatic measurement of soil pH having multiple probe assemblies.

FIG. 5 is a plan view of a field showing the relative positions of pH measurements made according to the standard method and the present invention.

FIG. 6 is a plan view showing the relative positions of certain parts of the apparatus shown in FIG. 1.

DESCRIPTION OF THE PREFERRED EMOBODIMENTS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended. Any alterations and further modifications in the described processes, systems, or devices, and any further applications of the principles of the invention as described herein are contemplated as would normally occur to one skilled in the art to which the invention relates.

Referring to Fig 1, an apparatus 100 for automatically measuring the soil pH according to the present invention is shown. Apparatus 100 includes a probe assembly 110 affixed to a chassis 120. Chassis 120 has a forward side 121 and a rear side 122, corresponding to the direction in which apparatus 100 moves when collecting data. Chassis 120 is supported by one or more wheels 130, which are adjustably mounted thereto, so as to allow chassis 120 to be raised or lowered relative to the surface of the ground 131. A tow hitch 140 is affixed on the forward side 121 of chassis 120, so that the apparatus can be towed by a standard tractor 132 or other appropriate vehicle. A shank 150 is affixed to chassis 120 directly in forward of probe assembly 110, and with the bottom edge of shank 150 positioned lower than the bottom of probe assembly 110 when the apparatus is not collecting data. A removable plate 180 is positioned parallel to the direction of travel, adjacent to the trailing edge of shank 150, and to the side of probe assembly 110. A top plan view of the shank 150/removable plate 180 arrangement is illustrated in FIG. 6.

A water tank 160 is connected by water hoses 165 to a water pump 167, which is in turn connected to nozzles (shown as 250 in FIG. 2) in probe assembly 110. In one embodiment, water pump 167 is a standard 12V water pump (such water pumps being commonly known in the art). A compressed air tank 170 is connected to an air cylinder (shown as 230 in FIG. 2) through air hoses 175. Preferably, water hoses 165 and air hoses 175 are affixed to chassis 120 at a number of places along chassis 120.

A location sensor 190 is affixed to chassis 120 or other convenient location. In one embodiment, location sensor 190 is a standard global positioning satellite (GPS) antenna.

A computer 180 is affixed to chassis 120, and is telemetrically connected to water pump 167, air cylinder 230, location sensor 190, and a probe (shown as 240 in FIG. 2), and is programmed automatically to record pH measurements made by probe 240, location measurements made by location sensor 190, to correlate pH measurements with the location at which they are made, and to control water pump 190 and air cylinder 230, as further described below. In an alternative embodiment, water pump 190 and air cylinder 230 are controlled by a separate computer.

Referring to FIG. 2, further details of probe assembly 110 for making periodic measurements of the pH of soil at a pre-selected depth is shown. The probe assembly 110 includes a sampling platform 210 affixed to a first shaft 211, which extends through a spring 214 and a mounting 218, discussed hereinafter. At least the top portion of first shaft 211 is threaded, and is engaged by a threaded nut 216. The bottom end of spring 214 abuts mounting 218, and the top end abuts a washer 219, which in turn abuts threaded nut 216. An adjustment piece 220 for adjusting the distance between the

threaded nut 216 and the air cylinder 230 is provided, comprising two parallel portions, each having a threaded through-hole 221, and a perpendicular portion. Through-holes 221 are oppositely threaded, with the bottom hole threaded appropriately to engage the threads on the top end of first shaft 211. First shaft 211 and an second shaft 212 engage oppositely threaded through-holes 221, so that the distance between shafts 211 and 212 can be increased or decreased by rotating adjustment piece 220 about the axis of shafts 211 and 212. Second shaft 212 passes through mounting 228, discussed hereinafter. The end of shaft 212 opposite to adjustment piece 220 is affixed to air cylinder 230.

Air cylinder 230 is adapted to actuate second shaft 212 (i.e. move the shaft 212 away from air cylinder 230) when air pressure is applied by compressed air tank 170 through air hoses 175. The range of actuation is at least about 5mm, and preferably does not exceed about 40mm. Air cylinder 230 is affixed to mounting 228. In one embodiment, the air pressure required to cause air cylinder 230 to actuate shaft 212 is 250kPa.

A probe 240 is affixed to the bottom end of a third shaft 241. At least the top portion of third shaft 241 is threaded. Third shaft 241 passes through a spring 242, mounting 218, and mounting 248. A threaded nut 246 engages the top portion of shaft 241, and abuts mounting 248. The top end of spring 242 abuts mounting 218, and the bottom end abuts probe 240. When correctly positioned, probe 240 is just above sampling platform 210 in its retracted position.

Nozzles 250 are connected to hoses 165, and are directed toward probe 240, so that when water is pumped from tank 160, streams of water contact probe 240.

Probe assembly 110 is affixed to chassis 120 by mountings 218, 228, and 248. Mountings 218, 228 are affixed on chassis 120 sufficiently closely to place spring 214 in compression when sampling platform 210 is positioned at least below the bottom edge of shank 150 by turning adjustment piece 220. Mountings 218 and 248 are affixed to chassis 120 sufficiently far apart so as to place spring 242 in compression when probe 240 has been positioned at least as low as the lowest position in which it might be used to make measurements. This allows spring 242 to hold probe 240 in position against jostling of probe assembly 110 during motion. The position of probe 240 can be adjusted by turning threaded nut 246. In one embodiment, when spring 214 is in tension, it will return sampling platform 210 to the retracted position when air cylinder 230 is at rest (deactivated). When air pressure is applied to air cylinder 230, the compression in spring 214 is overcome, and sampling platform 210 is moved to the extended position. In another embodiment, spring 214 retains sampling platform 210 in an intermediate position when no air pressure is applied to air cylinder 230, wherein the bottom of sampling platform 210 is above the bottom edge of shank 150.

Referring now to Fig 3., further details of the preferred embodiment of sampling platform 210 are illustrated. Sampling platform 210 comprises a tray portion 310, and support portions 320. In the preferred embodiment, tray portion 310 is lower in the middle than on the sides. In another embodiment, tray portion 310 is flat. In one embodiment, tray portion 310 is about 50mm wide, and less than 66mm long, relative to the direction of motion. Support portions 320 are affixed to bar 330, which is affixed in turn to shaft 211, so that sampling platform 210 is in mechanical communication with air

cylinder 230. In one embodiment, sampling platform 210 is about 150mm from the top of bar 330 to the bottom of tray portion 310.

In the preferred embodiment, probe 240 is the sensor of an Accumet Model 25 pH meter, which is operable to measure the pH of a soil sample when placed in contact therewith. In order to allow its measurement of the pH of the soil samples to stabilize, the probe must remain in contact with the sample for at least 5 seconds, and preferably for 6 seconds. Collection of the sample and cleaning of the probe between measurements can be accomplished in about 1.5 seconds. Therefore, the preferred period of a measurement cycle is about 8 seconds. As will be readily apparent to those skilled in the art, this permits a range of sampling densities to be used, by varying the speed at which the apparatus 100 is moved.

When measuring soil pH with apparatus 100, adjustably mounted wheels 130 are positioned so that the bottom edge of shank 150 is a distance below the point where wheels 130 contact the ground 131 corresponding to the desired depth of measurement, so that, when apparatus 100 is towed, shank 150 will remove soil above the selected depth forward of probe assembly 110, creating a trench of the selected depth. Removable plate 180 prevents upturned soil from falling back against probe assembly 110, potentially contaminating measurements or otherwise disrupting performance. FIG. 6 is a plan view, illustrating the relative position of shank 150, sampling platform 210, and removable plate 180.

Air cylinder 230 is adapted to actuate sampling platform 210 between at least two positions, including an extended position and a retracted position. In one embodiment, when air pressure is applied to air cylinder 230, sampling platform is moved to the

extended position, in which sampling platform 210 is brought into contact with the ground 131, and when air pressure is removed from air cylinder 230, compression in spring 214 returns sampling platform 210 to the retracted position, in which the soil sample is brought into contact with probe 240. In another embodiment, air pressure can be applied in two directions to air cylinder 230, one causing air cylinder 230 to move sampling platform 210 to its extended position, and the other causing air cylinder 230 to move sampling platform 210 to its retracted position. In this embodiment, spring 214 retains sampling platform 210 in an intermediate position when no air pressure is applied. In yet another embodiment, a variable air pressure can be applied to air cylinder 230 so as to cause sampling platform 210 to move to any position intermediate to the extended and retracted positions. Furthermore, those having ordinary skill in the art will recognize that any suitable linear actuator device may be used in place of air cylinder 230, such as a solenoid, stepper motor/lead screw, etc.

Prior to beginning measurement, sampling platform 210 is positioned by turning adjustment piece 220 so that when air cylinder 230 moves sampling platform 210 to its extended position it is 5mm below the bottom edge of shank 150. The tension in spring 214 is optionally adjusted by turning threaded nut 216. When the apparatus is moving, this will cause soil to be collected on sampling platform 210. Probe 240 is positioned by turning threaded nut 246 so that when sampling platform 210 is moved to its retracted position soil samples contained on the sampling platform 210 are brought into contact with probe 240.

While sampling platform 210 is extended, water is pumped by water pump 167 from tank 160 through hoses 165, and projected through nozzles 250 onto probe 140, so

as to remove remnants from the previous measurement which might otherwise contaminate the new sample. Preferably, water is projected under pressure of at least about 100kPa. By projecting water onto probe 140 while sampling platform 210 is extended, samples are collected simultaneously to cleaning probe 140, minimizing measurement cycle time. The operation of water pump 167 and air cylinder 230 is synchronized by computer 180, which controls the operations of both.

Computer 180 also records the position of apparatus 100 as measured by position measuring device 190 while sampling platform 210 is in the extended position. The pH measurement of this sample is recorded approximately 6 seconds later, just before the measurement cycle is completed, and is associated in the data storage device with the position of apparatus 100 when the sample was collected. In this way, the pH data is correctly identified with the position in the field from which the soil sample was taken, and not with the position of the apparatus when the measurement is made, which is later in time, when it will have moved some distance from the sample collection location.

Referring to Fig 4, an alternative embodiment of an apparatus for automatically measuring soil pH having a plurality of probe assemblies 110 and corresponding shanks 150 and removable plates 180 is shown. As will be readily apparent to those skilled in the art, by placing multiple probes on a single apparatus, a wider strip of field can be measured at a given sampling density, reducing the number of passes needed to measure a given area. Optionally, probe assemblies 110 and shanks 150 are slideably mounted on chassis 120 to permit a variable sampling density. In one embodiment, shanks 150 are independently adjustable, to allow each probe assembly to measure the pH of soil of an independently selected depth. In another embodiment, shanks 150 and probe assemblies

110 are positioned in at least two rows perpendicular to the direction of motion, so that at least two probe assemblies will measure soil from the same strip of soil. In this embodiment, shanks 150 can be adjusted so that shanks in more rearward rows run deeper than those in more forward rows, so that pH measurements can be simultaneously collected for a three dimensional map. In the preferred embodiment, the more rearward rows of probe assemblies can be positioned a distance behind the more forward rows of probe assemblies corresponding to an integral multiple of the sampling interval, such that deeper measurements are made at nearly the same position at which the shallower measurements are made.

Referring now to FIG. 5, typical sampling densities which can be achieved according to the standard soil mapping methods and the present invention are compared. A field 500 is shown, in which the pH was measured using both the prior art method and the present invention. Manually collected measurements 520 show the positions of data points in a pH map created by the prior art method, wherein the sampling density is one measurement per .5 acres. Automatically collected measurements 540 show the positions of measurements made with the apparatus 100 and methods of the present invention, using a single-probe apparatus 100.

While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the preferred embodiment has been shown and described and that all changes and modifications that come within the spirit of the invention are desired to be protected.

What is claimed:

1. An apparatus for automatically measuring the pH of soil at a relatively large number of places in the field, comprising a chassis suitable for towing by a standard tractor; a plurality of wheels; a tank for holding water; a compressed air tank; at least one shank for exposing the soil at the desired sampling depth; at least one pH sensor, each including at least one probe; a probe assembly for each probe, including a sampling platform for collecting soil from pre-selected soil depths and bringing it into contact with the probe, an actuator for moving the sampling platform between an extended position in which a soil sample is collected and a retracted position in which the soil sample is in contact with the probe, and one or more nozzles connected by hoses to the tanks of water for cleaning the probe between measurements by directing water onto it; and an onboard computer for collecting and storing the data.

ABSTRACT

An apparatus for automatically measuring soil pH at a relatively large number of places in a field, and automatically creating a soil pH map by simultaneously measuring the position of the apparatus and storing the pH data in association with the location from which the corresponding soil sample was taken. The apparatus includes a wheeled chassis, a shank for exposing soil at a controlled depth, a sampling tray for collecting soil, a probe for measuring the pH of the soil, a water supply for cleaning the probe between measurements, a device for measuring the location of the apparatus, and a computer for controlling the measurement cycle and recording the data.

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---



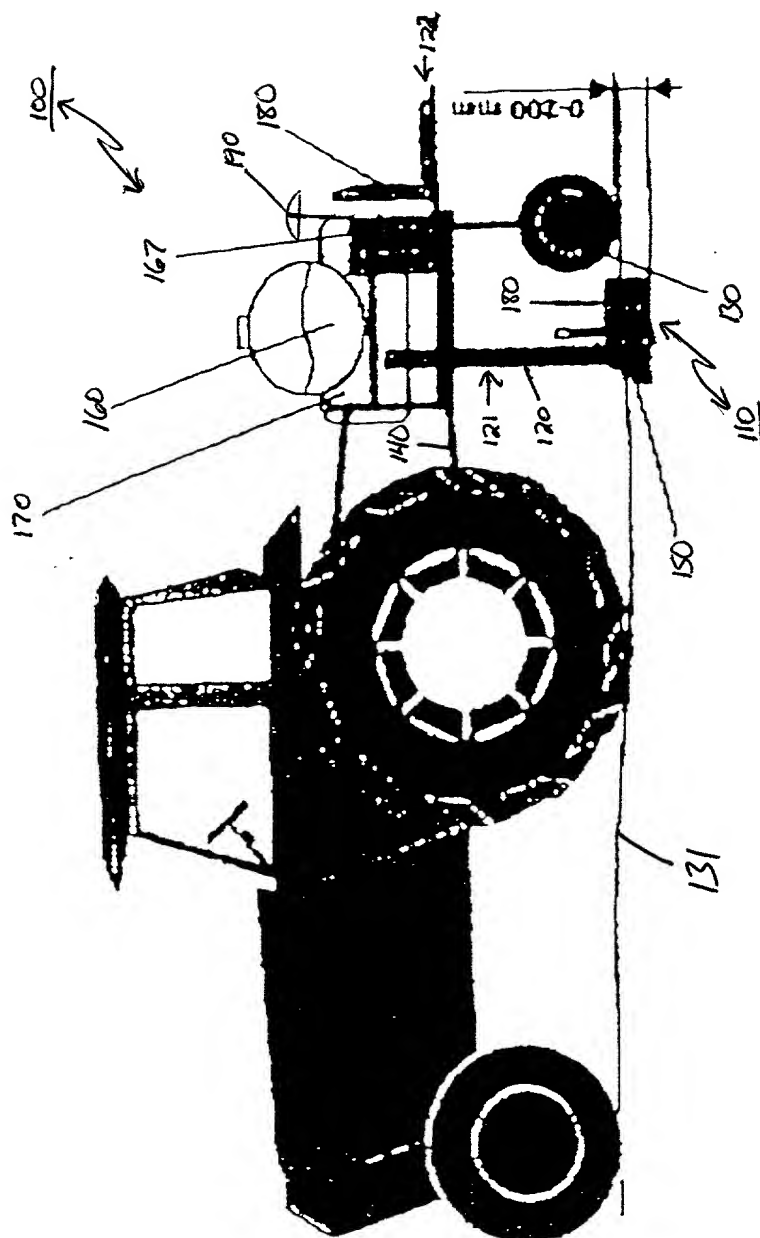


Fig 2.

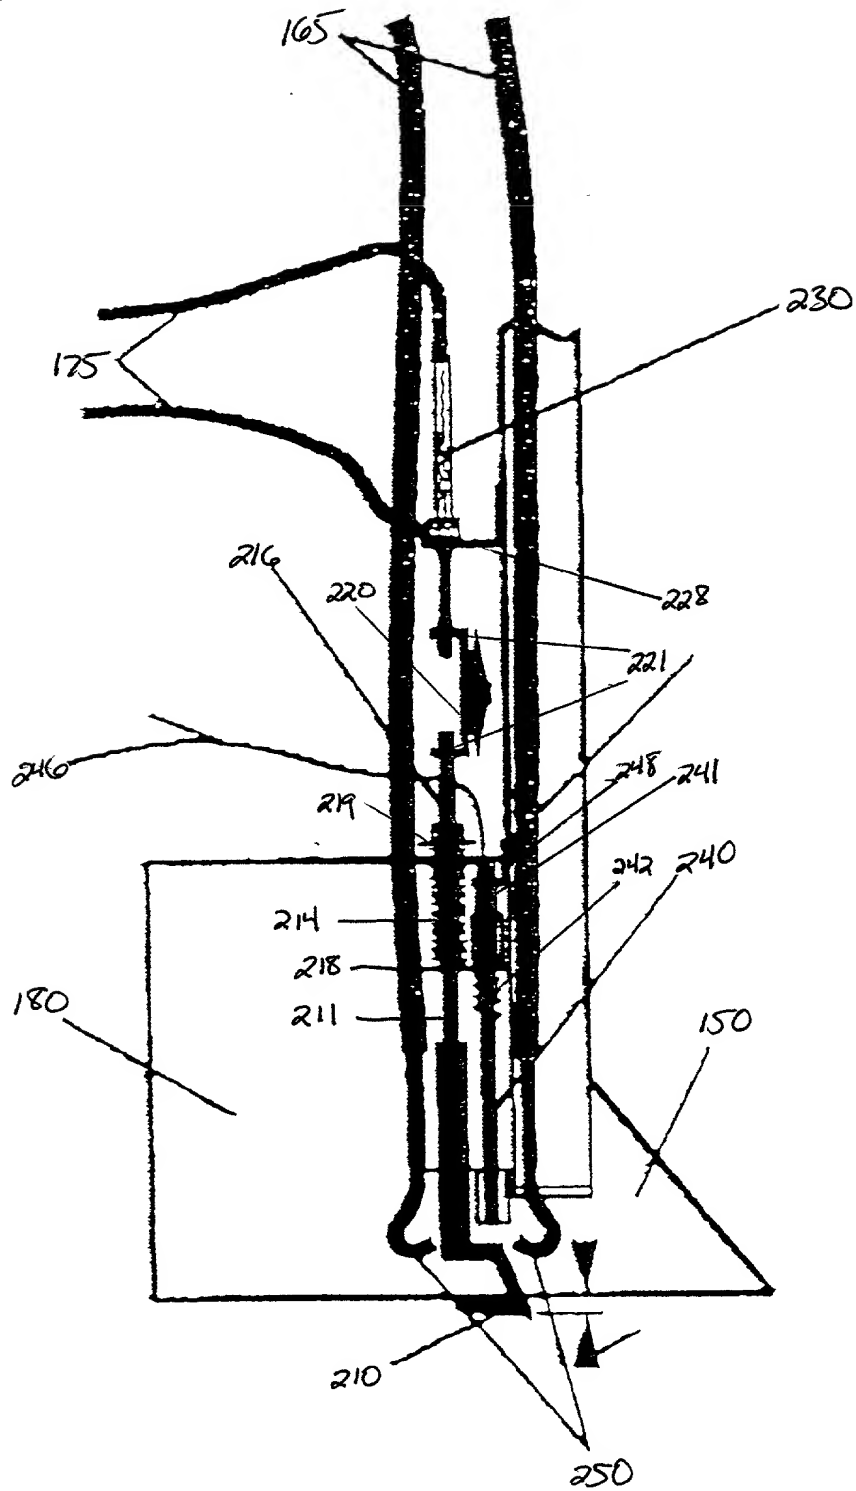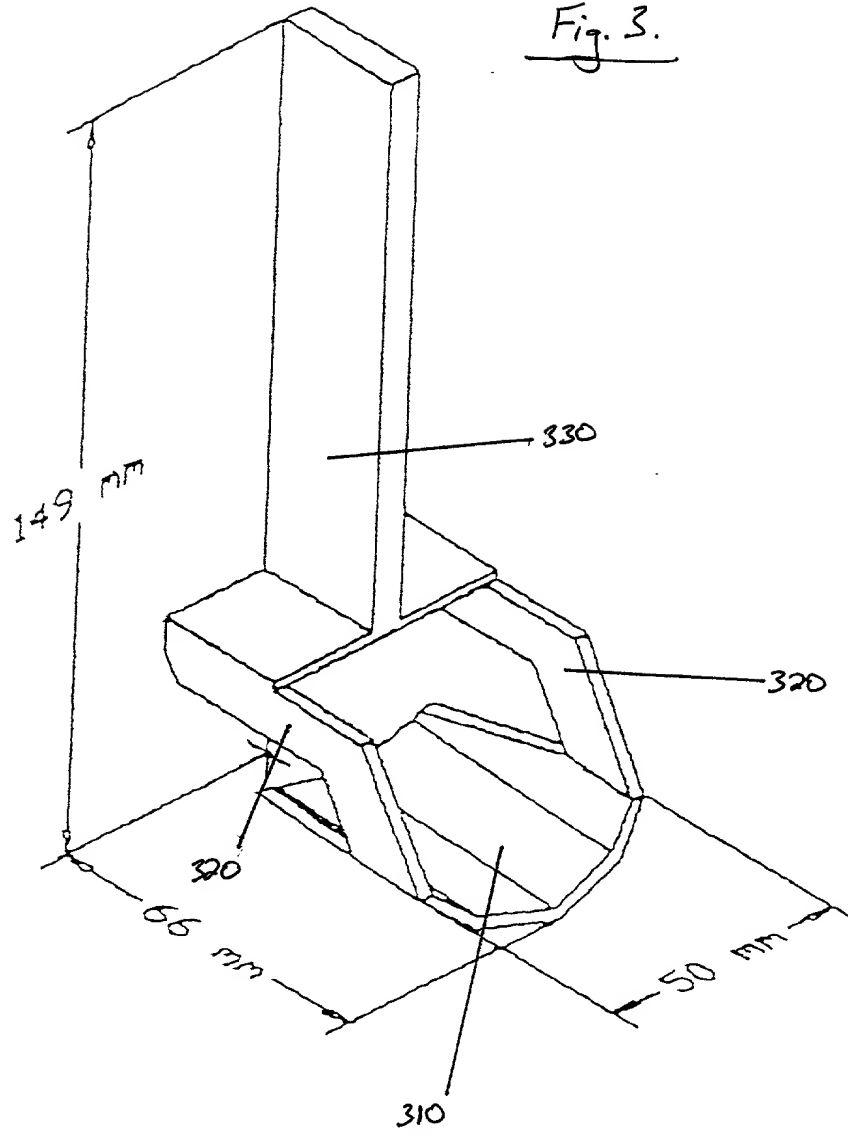

[illegible]

Fig. 3.



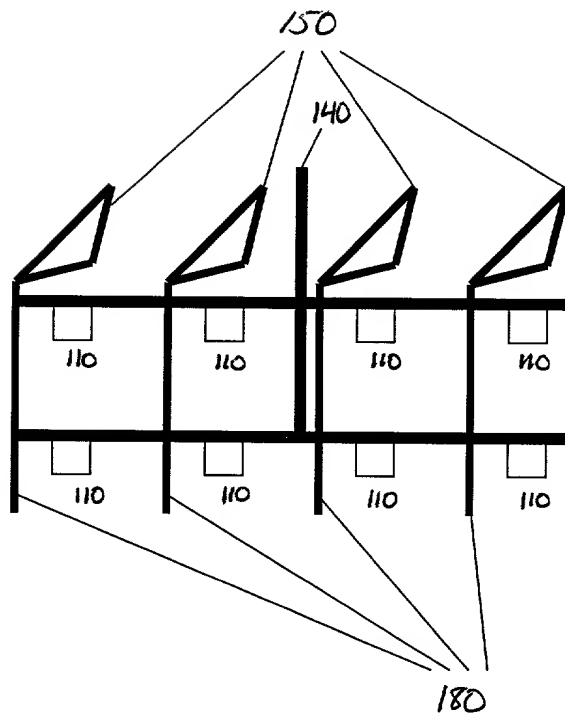


Fig 4

Fig. 5


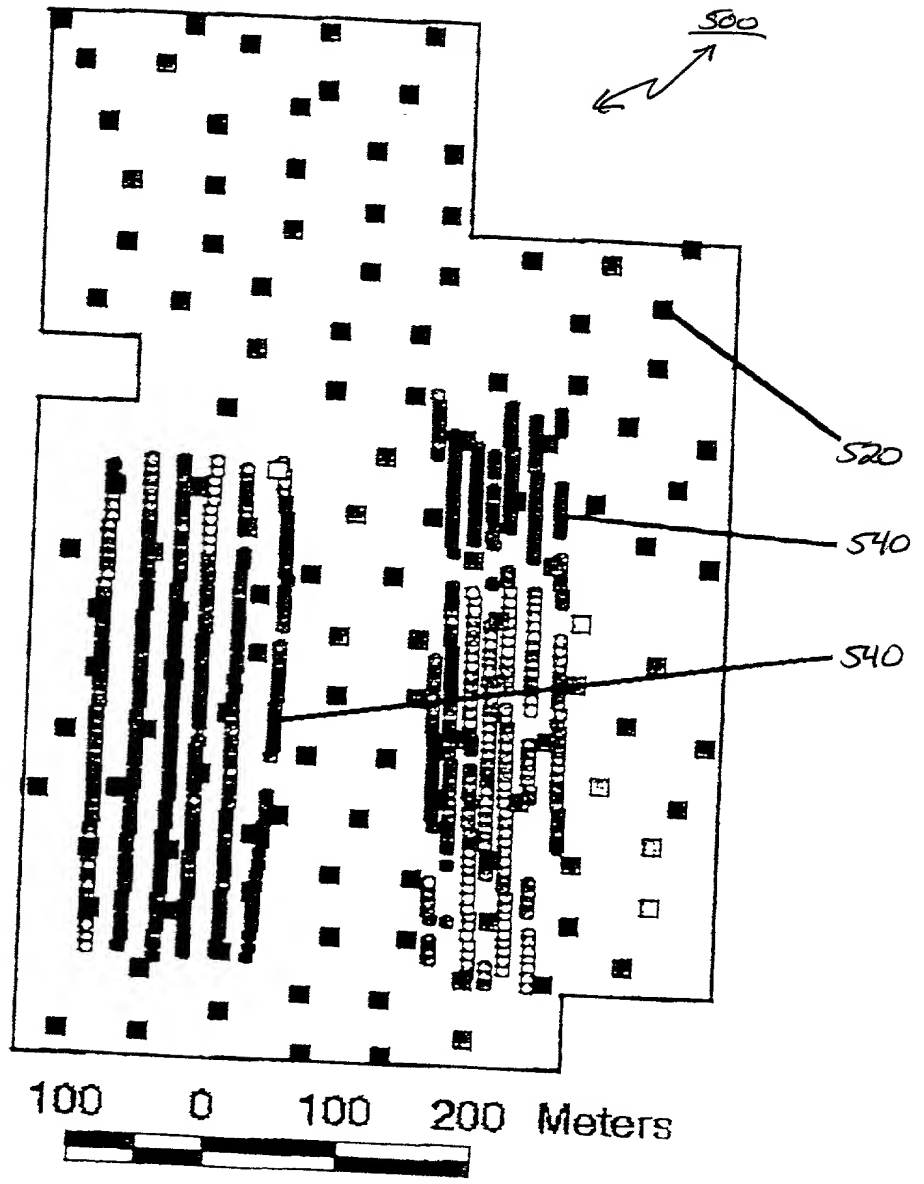


Fig. 6

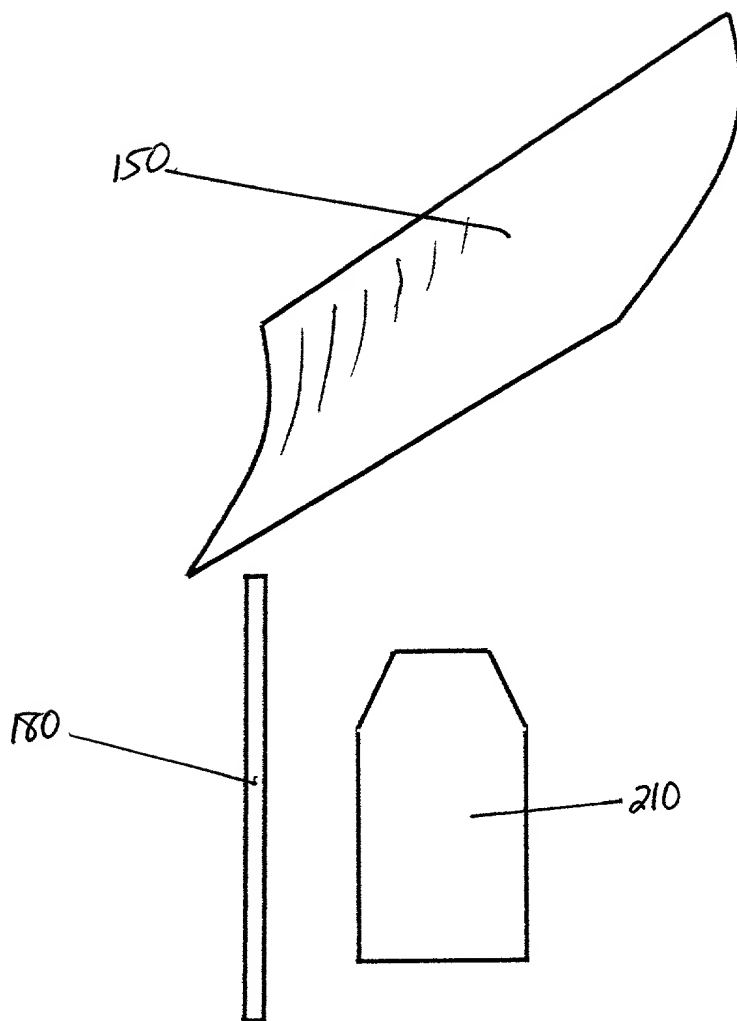

[illegible]

Docket No.: 7024-415

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled SYSTEM AND METHOD FOR AUTOMATED MEASUREMENT OF SOIL pH, the written description of which was filed on August 11, 1999, Serial No. _____.

I hereby state that I have reviewed and understand the contents of the above-identified issued patent specification, including the claims.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)

(Country)

(Day/Month/Year Filed)

Yes No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

60/096.172

(Application Number)

August 11, 1998

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status-pat./pending/abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Harold R. Woodard, No. 16,214; C. David Emhardt, No. 18,483; Joseph A. Naughton, Jr., No. 19,814; John V. Moriarty, No. 26,207; John C. McNett, No. 25,533; Thomas Q. Henry, No. 28,309; James M.

Durlacher, No. 28,840; Charles R. Reeves, No. 28,750; Vincent O. Wagner, No. 29,596; Steve Zlatos, No. 30,123; Spiro Bereveskos, No. 30,821; William F. Bahret, No. 31,087; Clifford W. Browning, No. 32,201; R. Randall Frisk, No. 32,221; Daniel J. Lueders, No. 32,581; Kenneth A. Gandy, No. 33,386; Timothy N. Thomas, No. 35,714; Kerry P. Sisselman, No. 37,237; Kurt N. Jones, No. 37,996; John H. Allie, No. 39,088; Holiday W. Banta, No. P40,311; Troy J. Cole; No. 35,102; L. Scott Paynter, No. 39,797; Lisa A. Hiday, No. 40,036; Darrin Wesley Harris, No. 40,636; Matthew R. Schantz, No. 40,800; Gregory B. Coy, No. 40,967; John V. Daniluck, No. 40,581; Charles J. Meyer, No. P-41,996; Christopher A. Brown, No. P-41,642; A.J. Usher, IV, No. 41,359; Scott J. Stevens, No. 29,446; James B. Myers, No. 42,021; Jason J. Schwartz, No. P43,910 and Douglas A. Collier, No. P43,556.

Address all telephone calls to: Troy J. Cole at (317) 634-3456
Address all correspondence to: Troy J. Cole
Woodard Emhardt Naughton Moriarty & McNett
Bank One Center/Tower
111 Monument Circle, Suite 3700
Indianapolis, Indiana 46204-5137

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: Viacheslav I. Adamchuck

Inventor's Signature: _____ Date of Signature _____
Residence: 3^A Potehina Street, Apt. 87, Kyiv, 252127, Ukraine
Citizenship: _____
Post Office Address: 3^A Potehina Street, Apt. 87, Kyiv, 252127, Ukraine

Full name of second inventor: Mark T. Morgan

Inventor's Signature: _____ Date of Signature _____
Residence: 7640 Mushroom Lane, Lafayette, IN 47905
Citizenship: U.S.A.
Post Office Address: 7640 Mushroom Lane, Lafayette, IN 47905

Full name of third inventor: Daniel R. Ess

Inventor's Signature: _____ Date of Signature _____
Residence: 3026 Greenbriar Avenue, West Lafayette, Indiana 47906
Citizenship: U.S.A.
Post Office Address: 3026 Greenbriar Avenue, West Lafayette, Indiana 47906